


Walraven BISOFIX® MW Cold Clamp LD

(D0545)

for fixing insulated pipes with non-flammable hangers

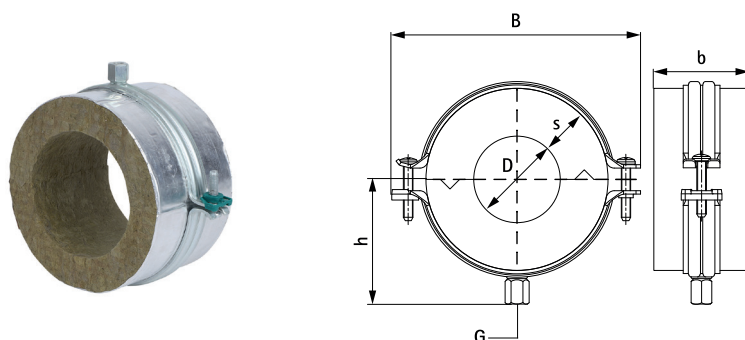

Features & benefits

- for fixing of thermal isolated pipe of plastic, steel, copper or stainless steel
- non-flammable cooling pipe carrier with hard stone wool core and 2-screw clamp (Bifix® G2)
- with quick locking system
- a vapour sealed connection with pipe insulation can easily be made by use of self-adhesive, overlapping aluminium tape
- material: pipe clamp UltraProtect®1000 surface treatment
- material: insulation made of stone wool laminated with glass fibre reinforced aluminium foil
- silicone free; diffusion equivalent air layer thickness (sd value) > 1500 m; water absorption < 1Kg/m
- fire classification: A2-s1, d0 according to EN 13501
- temperature range: 0-250 °C wool side, max. 80 °C at lamination acc. to EN 14707
- fire tested clamps

Product Number	Outside Pipe Diameter	DN	Connection Thread	Total Width x Total Height x Total Length	Insulation Thickness	Maximum Allowed Load Faz
Reference letter	D	D	G	W x H x L	Is	Fa,z
Unit description	(mm)			(mm) x (mm) x (mm)	(mm)	(N)
231020006	6		M8/M10	84 x 66 x 60	20	100
231020010	10		M8/M10	91 x 73 x 60	20	100
231020012	12		M8/M10	91 x 73 x 60	20	150
231020015	15		M8/M10	97 x 79 x 60	20	150
231020018	18	DN 10	M8/M10	97 x 79 x 60	20	200
231020022	22	DN 15	M8/M10	104 x 86 x 60	20	200
231020028	28	DN 20	M8/M10	110 x 92 x 60	20	200
231023006	6		M8/M10	91 x 73 x 60	23	100
231023010	10		M8/M10	97 x 79 x 60	23	100
231023012	12		M8/M10	97 x 79 x 60	23	150
231023015	15		M8/M10	104 x 86 x 60	23	150
231023018	18	DN 10	M8/M10	104 x 86 x 60	23	200
231023022	22	DN 15	M8/M10	110 x 92 x 60	23	200
231023028	28	DN 20	M8/M10	118 x 100 x 60	23	200
231030006	6		M8/M10	110 x 92 x 60	30	100
231030010	10		M8/M10	110 x 92 x 60	30	100
231030012	12		M8/M10	109 x 91 x 60	30	150
231030015	15		M8/M10	118 x 100 x 60	30	150
231030028	28	DN 20	M8/M10	134 x 115 x 60	30	200
231040015	15		M8/M10	142 x 123 x 60	40	150
231040018	18	DN 10	M8/M10	142 x 123 x 60	40	200
231040022	22	DN 15	M8/M10	148 x 129 x 60	40	200
231040028	28	DN 20	M8/M10	155 x 137 x 60	40	200
231040032	32		M8/M10	155 x 137 x 60	40	200