


Walraven BISOFIX® MW Cold Clamp MD

(D0546)

for fixing insulated pipes with non-flammable hangers

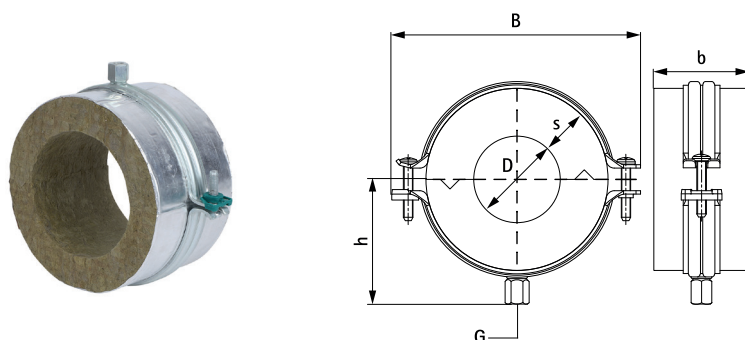

Features & benefits

- for fixing of thermal isolated pipe of plastic, steel, copper or stainless steel
- non-flammable cooling pipe carrier with hard stone wool core and 2-screw clamp (Bifix® G2)
- with quick locking system
- a vapour sealed connection with pipe insulation can easily be made by use of self-adhesive, overlapping aluminium tape
- material: pipe clamp UltraProtect®1000 surface treatment
- material: insulation made of stone wool laminated with glass fibre reinforced aluminium foil
- silicone free; diffusion equivalent air layer thickness (sd value) > 1500 m; water absorption < 1Kg/m
- fire classification: A2-s1, d0 according to EN 13501
- temperature range: 0-250 °C wool side, max. 80 °C at lamination acc. to EN 14707
- fire tested clamps

Product Number	Outside Pipe Diameter	DN	Connection Thread	Total Width x Total Height x Total Length	Insulation Thickness	Maximum Allowed Load Faz
Reference letter	D	D	G	W x H x L	Is	Fa,z
Unit description	(mm)			(mm) x (mm) x (mm)	(mm)	(N)
231020035	35	DN 25	M8/M10	118 x 100 x 60	20	300
231020042	42	DN 32	M8/M10	125 x 107 x 60	20	300
231020048	48	DN 40	M8/M10	134 x 115 x 60	20	400
231030035	35	DN 25	M8/M10	142 x 123 x 60	30	300
231030054	54		M8/M10	155 x 137 x 60	30	400
231030060	60	DN 50	M8/M10	164 x 145 x 60	30	500
231030064	64		M8/M10	172 x 154 x 60	30	500
231030076	76	DN 65	M8/M10	181 x 162 x 60	30	800
231040035	35	DN 25	M8/M10	155 x 137 x 60	40	300
231040042	42	DN 32	M8/M10	164 x 145 x 60	40	300
231040042	42		M8/M10	172 x 154 x 60	44	300
231050042	42	DN 32	M8/M10	189 x 171 x 60	50	300
231050048	48	DN 40	M8/M10	201 x 183 x 60	50	400
231050054	54		M8/M10	201 x 183 x 60	50	400
231060054	54		M8/M10	229 x 208 x 60	60	400
231060060	60	DN 50	M8/M10	229 x 208 x 60	60	500
231060064	64		M8/M10	229 x 208 x 60	60	500
231060076	76	DN 65	M8/M10	248 x 227 x 60	60	800
231067064	64		M16	274 x 226 x 60	67	800
231070076	76	DN 65	M8/M10	275 x 253 x 60	70	800