


Walraven BISOFIX® MW Cold Clamp HD

(D0550)

for fixing insulated pipes with non-flammable hangers

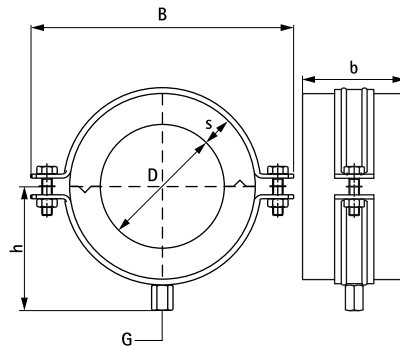

Features & benefits

- for fixing of thermal isolated pipe of plastic, steel, copper or stainless steel
- non-flammable cooling pipe carrier with hard stone wool core and Heavy Duty Clamp HD500
- a vapour sealed connection with pipe insulation can easily be made by use of self-adhesive, overlapping aluminium tape
- material: pipe clamp UltraProtect®1000 surface treatment
- material: insulation made of stone wool laminated with glass fibre reinforced aluminium foil
- silicone free; diffusion equivalent air layer thickness (sd value) > 1500 m; water absorption < 1Kg/m
- fire classification: A2-s1, d0 according to EN 13501
- melting point: Stone wool > 1000 °C
- fire tested clamps

Product Number	Outside Pipe Diameter	DN	Connection Thread	Total Width x Total Height x Total Length	Insulation Thickness	Maximum Allowed Load Faz
Reference letter	D	D	G	W x H x L	Is	Fa,z
Unit description	(mm)			(mm) x (mm) x (mm)	(mm)	(N)
231030089	89	DN 80	M10/M12	215 x 191 x 80	30	1100
231030108	108		M10/M12	240 x 207 x 80	30	1300
231030114	114	DN 100	M10/M12	254 x 221 x 80	30	1300
231030140	140	DN 125	M10/M12	274 x 240 x 100	30	1800
231030159	159		M10/M12	299 x 265 x 100	30	2200
231040169	169	DN 150	M16	335 x 290 x 100	40	3000
231040219	219	DN 200	M16	380 x 337 x 100	40	5000
231060089	89	DN 80	M10/M12	290 x 256 x 80	60	1100
231060108	108		M16	299 x 263 x 80	60	1300
231060114	114	DN 100	M16	322 x 277 x 80	60	1800
231070140	140	DN 125	M16	367 x 324 x 100	70	2200
231070159	159		M16	380 x 337 x 100	70	2200
231070169	169	DN 150	M16	385 x 354 x 100	70	3000
231070219	219	DN 200	M16	439 x 395 x 100	70	5000
231080076	76	DN 65	M16	322 x 277 x 80	80	800
231100089	89	DN 80	M16	367 x 324 x 100	100	1100
231100114	114	DN 100	M16	385 x 354 x 100	100	1800
231120108	108		M16	439 x 395 x 100	120	1300
231120114	114	DN 100	M16	439 x 395 x 100	120	1800
231120140	140	DN 125	M16	367 x 324 x 100	120	2200
231120159	159		M16	487 x 443 x 100	120	2200
231120169	169	DN 150	M16	498 x 441 x 100	120	3000
231120219	219	DN 200	M16	537 x 493 x 100	120	5000