
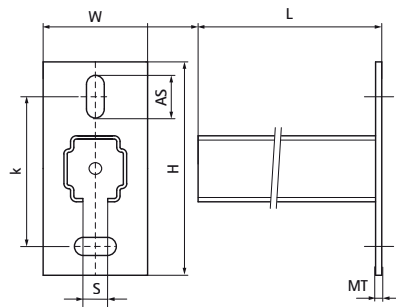


Walraven RapidRail® Cantilever Arm

(G1007)

fixing to wall, floor or ceiling



Features & benefits

- base plate with welded C-profile
- for quick and adjustable fixing of one or multiple pipes
- CO2 welded
- with continuous perforation
- with sawing marks each 50 mm
- unique hole pattern at type 30x20 allows to click in Walraven RapidRail® Hammerfix from both sides
- material: base plate made of steel 1.0332 (DD11)
- material: profiles type 27x18 and 30x20 made of steel 1.0330 (DC01)
- zinc plated
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Technical Details Walraven RapidRail®'



Product Number	Type	Length	Total Width x Total Height x Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference letter		<i>l</i>	<i>W x H x L</i>	<i>MT</i>	<i>AS</i>	<i>S</i>	<i>k</i>
Unit description		mm	mm x mm x mm	mm	mm	mm	mm
66031815	27x18	150	38 x 110 x 154	4	16x11	15	70
66031820	27x18	200	38 x 110 x 204	4	16x11	15	70
66031830	27x18	300	38 x 110 x 304	4	16x11	15	70
66031850	27x18	500	38 x 110 x 504	4	16x11	15	70
66031520	30x15	200	38 x 110 x 204	4	16x11	15	70
66031530	30x15	300	38 x 110 x 304	4	16x11	15	70
66032015	30x20	150	38 x 110 x 154	4	16x11	15	70
66032020	30x20	200	38 x 110 x 204	4	16x11	15	70
66032025	30x20	250	38 x 110 x 254	4	16x11	15	70
66033020	30x30	200	48 x 110 x 205	5	18x11	15	70
66033025	30x30	250	48 x 110 x 255	5	18x11	15	70
66033030	30x30	300	48 x 110 x 305	5	18x11	15	70
66033040	30x30	400	48 x 110 x 405	5	18x11	15	70
66033050	30x30	500	48 x 110 x 505	5	18x11	15	70
66036820	38x40	200	48 x 130 x 200	5	25x11	15	90
66036825	38x40	250	48 x 130 x 250	5	25x11	15	90
66036835	38x40	350	48 x 130 x 350	5	25x11	15	90
66036840	38x40	400	48 x 130 x 400	5	25x11	15	90
66036850	38x40	500	48 x 130 x 500	5	25x11	15	90
66036860	38x40	600	48 x 130 x 600	5	25x11	15	90
66036875	38x40	750	48 x 130 x 750	5	25x11	15	90
66036805	38x40	1,050	48 x 130 x 1,050	5	25x11	15	90