


## Walraven RapidStrut® channel DS 5 (BUP1000)

(H0405)

for medium weight fixing applications

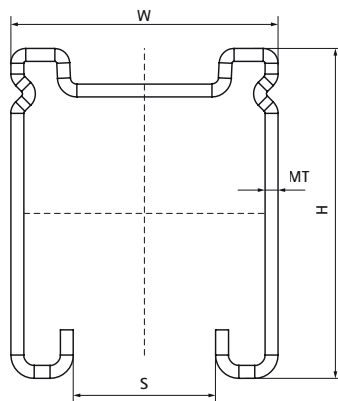

### Features & benefits

- for a quick and easy fixing
- unique hole pattern, allowing Walraven RapidStrut® Accessories to be mounted on both sides of the rail
- very high corrosion resistance (Walraven Walraven UltraProtect® 1000)
- corrosion protection remains intact after cutting
- strength minimal equal to Walraven RapidStrut® 41x41x2.5 mm
- with continuous perforation
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- material: steel 1.0242
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'

Product Number	Type	Total Width x Total Height x Total Length	Material Thickness	Profile Opening
<i>Reference letter</i>		<i>W x H x L</i>	<i>MT</i>	<i>S</i>
<i>Unit description</i>		<i>(mm) x (mm) x (mm)</i>	<i>(mm)</i>	<i>(mm)</i>
650580600	51   M	41 x 51 x 600	2	22
65058252	51   M	41 x 51 x 2000	2	22
65058352	51   M	41 x 51 x 3000	2	22
65058652	51   M	41 x 51 x 6000	2	22