


## Walraven RapidStrut® channel Double (BUP)

(H0409)

double profile for adapting on both sides of the rail

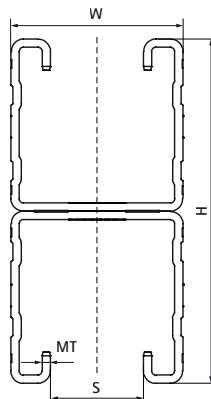

### Features & benefits

- universal rail system
- double sided back on back rail with continuous perforation
- inward formed flanges with serrated profile for extra grip
- with sawing marks each 50 mm on both sides
- material: steel 1.0242 (S250GD)
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	Type	Total Width x Total Height x Total Length	Material Thickness	Profile Opening
Reference letter		W x H x L	MT	S
Unit description		(mm) x (mm) x (mm)	(mm)	(mm)
65018626	21   M - Double	41 x 42 x 6000	2	22
65018646	41   M - Double	41 x 82 x 6000	2	22
65018666	62   H - Double	41 x 124 x 6000	2.50	22
65018466	62   H - Double	41 x 124 x 4000	2.50	22