
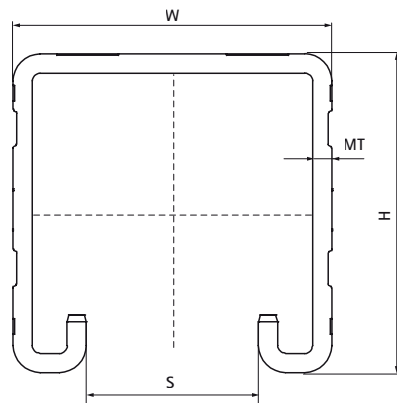


# Walraven RapidStrut® channel (pg)

(H0410)

for medium weight fixing applications

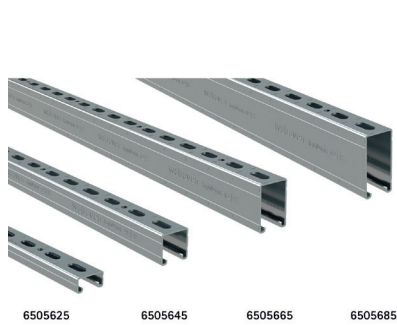

## Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- pre-galvanized
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'

## EPD

| Product Number   | Type   | Total Width x Total Height x Total Length | Material Thickness | Profile Opening |
|------------------|--------|-------------------------------------------|--------------------|-----------------|
| Reference letter |        | W x H x L                                 | MT                 | S               |
| Unit description |        | mm x mm x mm                              | mm                 | mm              |
| 6505224054       | 21   L | 41 x 21 x 540                             | 1.5                | 22              |
| 6505224          | 21   L | 41 x 21 x 2,000                           | 1.5                | 22              |
| 6505324          | 21   L | 41 x 21 x 3,000                           | 1.5                | 22              |
| 6505624          | 21   L | 41 x 21 x 6,000                           | 1.5                | 22              |
| 6505222          | 21   M | 41 x 21 x 2,000                           | 2                  | 22              |
| 6505322          | 21   M | 41 x 21 x 3,000                           | 2                  | 22              |
| 6505622          | 21   M | 41 x 21 x 6,000                           | 2                  | 22              |
| 6505225          | 21   H | 41 x 21 x 2,000                           | 2.5                | 22              |
| 6505325          | 21   H | 41 x 21 x 3,000                           | 2.5                | 22              |
| 6505625          | 21   H | 41 x 21 x 6,000                           | 2.5                | 22              |
| 6505244          | 41   L | 41 x 41 x 2,000                           | 1.5                | 22              |
| 6505344          | 41   L | 41 x 41 x 3,000                           | 1.5                | 22              |
| 6505644          | 41   L | 41 x 41 x 6,000                           | 1.5                | 22              |
| 6505242          | 41   M | 41 x 41 x 2,000                           | 2                  | 22              |
| 6505342          | 41   M | 41 x 41 x 3,000                           | 2                  | 22              |
| 6505642          | 41   M | 41 x 41 x 6,000                           | 2                  | 22              |
| 6505245          | 41   H | 41 x 41 x 2,000                           | 2.5                | 22              |
| 6505345          | 41   H | 41 x 41 x 3,000                           | 2.5                | 22              |
| 6505645          | 41   H | 41 x 41 x 6,000                           | 2.5                | 22              |
| 6505365          | 62   H | 41 x 62 x 3,000                           | 2.5                | 22              |
| 6505665          | 62   H | 41 x 62 x 6,000                           | 2.5                | 22              |
| 6505385          | 82   H | 41 x 82 x 3,000                           | 2.5                | 22              |
| 6505685          | 82   H | 41 x 82 x 6,000                           | 2.5                | 22              |