


Walraven RapidStrut® channel (3.0 / pg)

(H0412)

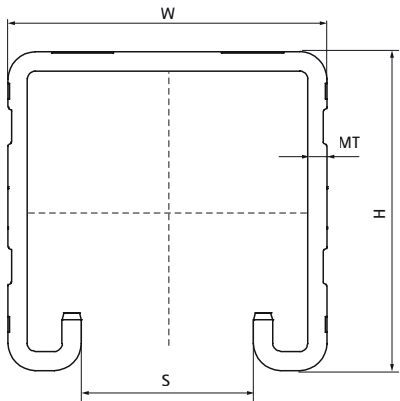

Features & benefits

- universal rail system
- with continuous perforation
- distance between rail end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0242
- suitable for use with Promat constructions 476 / 477 / 478
- For more information about the max. allowed load please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'.



Product Number	Type	Total Width x Total Height x Total Length	Material Thickness	Profile Opening
Reference letter		W x H x L	MT	S
Unit description		(mm) x (mm) x (mm)	(mm)	(mm)
65053453	41x41x3,0	41 x 41 x 3000	3	22
65056453	41x41x3,0	41 x 41 x 6000	3	22
65056653	41x41x3,0	41 x 62 x 6000	3	22