
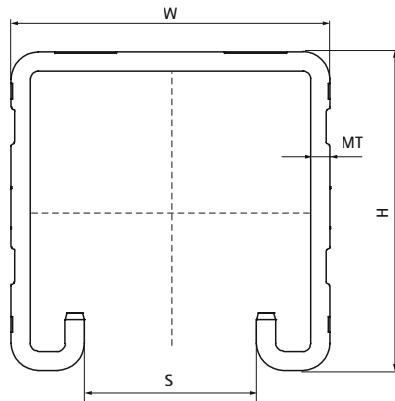


Walraven RapidStrut® channel (BUP1000)

(H0413)

for medium weight fixing applications

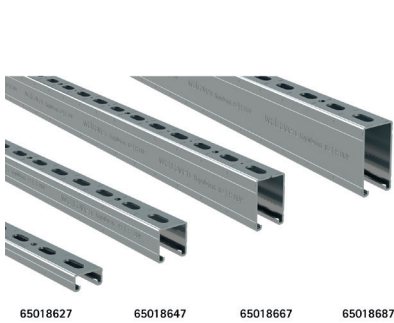

Features & benefits

- universal channel system
- corrosion protection remains intact after cutting
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- material: steel 1.0242 (S250GD)
- product is part of the Walraven Walraven UltraProtect® 1000 system
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	Type	Total Width x Total Height x Total Length	Material Thickness	Profile Opening
Reference letter		W x H x L	MT	S
Unit description		mm x mm x mm	mm	mm
65018622	21 M	41 x 21 x 6,000	2	22
65018227	21 H	41 x 21 x 2,000	2.5	22
65018327	21 H	41 x 21 x 3,000	2.5	22
65018627	21 H	41 x 21 x 6,000	2.5	22
65018244	41 L	41 x 41 x 2,000	1.5	22
65018344	41 L	41 x 41 x 3,000	1.5	22
65018444	41 L	41 x 41 x 4,000	1.5	22
65018644	41 L	41 x 41 x 6,000	1.5	22
65018242	41 M	41 x 41 x 2,000	2	22
65018342	41 M	41 x 41 x 3,000	2	22
65018642	41 M	41 x 41 x 6,000	2	22
6501847050	41 H	41 x 41 x 500	2.5	22
6501847075	41 H	41 x 41 x 750	2.5	22
6501847100	41 H	41 x 41 x 1,000	2.5	22
6501847120	41 H	41 x 41 x 1,200	2.5	22
6501847180	41 H	41 x 41 x 1,800	2.5	22
6501847240	41 H	41 x 41 x 2,400	2.5	22
6501827050	21 H	41 x 21 x 500	2.5	22
6501827100	21 H	41 x 21 x 1,000	2.5	22
65018247	41 H	41 x 41 x 2,000	2.5	22
65018347	41 H	41 x 41 x 3,000	2.5	22
65018647	41 H	41 x 41 x 6,000	2.5	22
65018367	62 H	41 x 62 x 3,000	2.5	22
65018667	62 H	41 x 62 x 6,000	2.5	22
65018387	82 H	41 x 82 x 3,000	2.5	22
65018687	82 H	41 x 82 x 6,000	2.5	22