


Walraven RapidStrut® channel Double (pg)

(H0440)

double profile for adapting on both sides of the rail

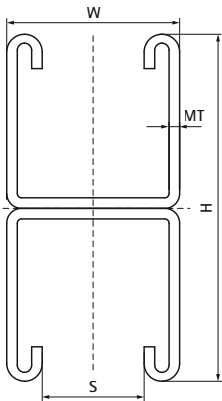

- Features & benefits
- universal rail system
  - double sided back on back rail with continuous perforation
  - inward formed flanges with serrated profile for extra grip
  - with sawing marks each 50 mm on both sides
  - material: steel 1.0242 (S250GD)
  - pre-galvanized
  - version Double 62 tested for fire safety
  - for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'

Product Number	Type	Total Width x Total Height x Total Length	Material Thickness	Profile Opening
Reference letter		W x H x L	MT	S
Unit description		(mm) x (mm) x (mm)	(mm)	(mm)
65015626	21   M - Double	41 x 42 x 6000	2	22
65015646	41   M - Double	41 x 82 x 6000	2	22
65015666	62   H - Double	41 x 124 x 6000	2.50	22