


Walraven RapidStrut® channel Double (pg)

(H0440)

double profile for adapting on both sides of the channel

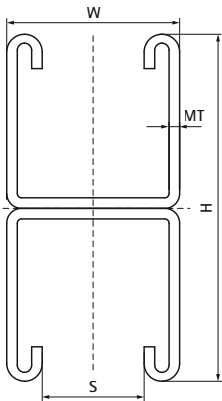

- Features & benefits**
- universal channel system
 - double sided back on back channel with continuous perforation
 - inward formed flanges with serrated profile for extra grip
 - with sawing marks each 50 mm on both sides
 - material: steel 1.0242 (S250GD)
 - pre-galvanized
 - version Double 62 tested for fire safety
 - for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'

Product Number	Type	Total Width x Total Height x Total Length	Material Thickness	Profile Opening
Reference letter		W x H x L	MT	S
Unit description		mm x mm x mm	mm	mm
65015626	21 M - Double	41 x 42 x 6,000	2	22
65015646	41 M - Double	41 x 82 x 6,000	2	22
65015666	62 H - Double	41 x 124 x 6,000	2.5	22