


Walraven RapidStrut® Cantilever Arm 41x41D (BUP1000)

(H0810)

double profile for adapting on both sides of the cantilever

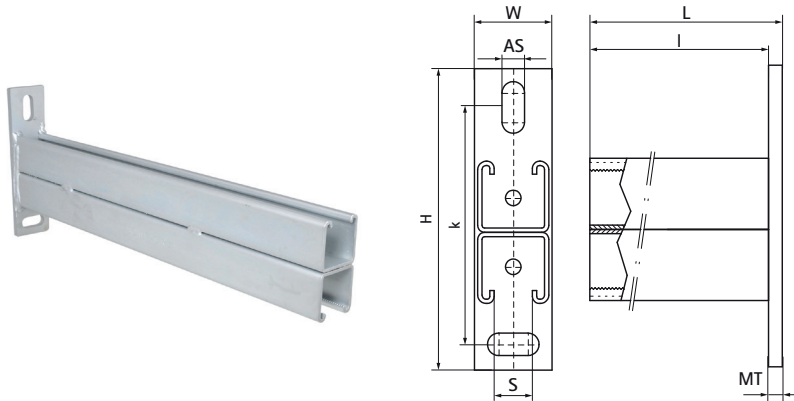

Features & benefits

- base plate with welded Double RapidStrut® Profile
- slots at 90° to each other to simplify fixing
- CO2 welded
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'

Product Number	Type	Length	Total Width x Total Height x Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference letter		<i>l</i>	<i>W x H x L</i>	<i>MT</i>	<i>AS</i>	<i>S</i>	<i>k</i>
Unit description		(mm)	(mm) x (mm) x (mm)	(mm)	(mm)	(mm)	(mm)
6603883	41x41x2,5	450	45 x 175 x 458	8	30x13	22	87.50
6603884	41x41x2,5	600	45 x 175 x 608	8	30x13	22	87.50
66088240	41 M - Double	400	50 x 177.50 x 410	10	20x13	22	135
66088260	41 M - Double	600	50 x 177.50 x 610	10	20x13	22	135
66088280	41 M - Double	800	50 x 177.50 x 810	10	20x13	22	135
66088298	41 M - Double	1000	50 x 177.50 x 1010	10	20x13	22	135