


Walraven Adjustable Support Bracket

(H1242)

support bracket fastener for high adjustable rail installation

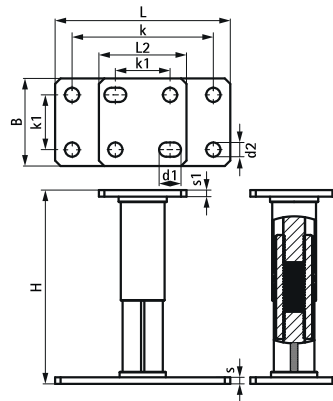

Features & benefits

- height adjustment range 135mm to 210mm also in installed state (left/right thread)
- suitable for all Walraven RapidStrut® rails (advised to use open side down for flexibility to meet the holes)
- use up to class 1-2 according to Eurocode 5 (indoor and covered outdoor area without weather influences)
- material: metal parts made of steel S235JR; protection cover made of plastic, grey
- zinc plated (Zn-Fe zinc / iron coating)
- For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.
- In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.

Product Number	For Rail Type	Total Width x Total Height x Total Depth	Width	Material Thickness	Material Thickness 2	Anchoring Hole	Anchoring Hole 2	Anchoring Slot	Anchoring Slot 2	Heart To Heart Distance	Heart To Heart Dis- tance 2
Reference letter		W x H x D x T	w	MT	MT 2	AH	AH 2	AS	AS 2	k	k 2
Unit description		mm x mm x mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
66583810	41x21, 41x41, 41x51, 41x62, 41x82	160 x 200 x 80	80	6	6	13	13	20x13	20x13	129	50