


Walraven Flexible Rail Prop

(H1607)

reinforcement of rail fabrications

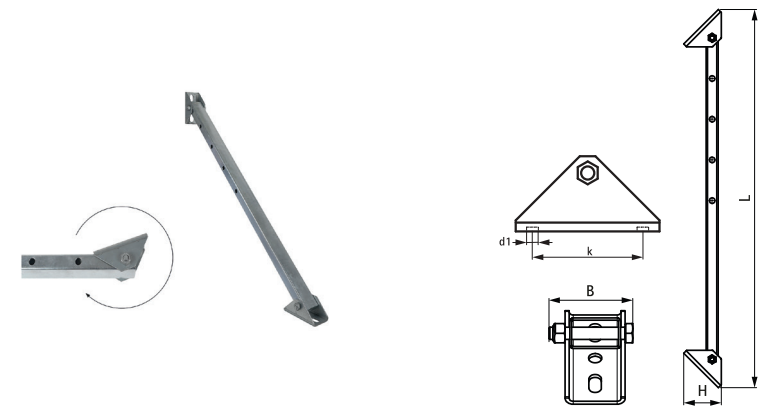

Features & benefits

- flexible angle support bracket
- to strengthen rail constructions
- by additional holes the length can be reduced in steps of 100mm
- suitable for Walraven RapidStrut® rails and for Maxx rails
- material: u-plate steel 1.0242 (S250GD); tube profile: steel 1.0038 (S235JR)
- u-plate: ZM310-MAC (pre-galvanized); tube profile: hot-dip galvanized 50-80 µm
- The safeload value is the safe load in axial direction (tension or compression) that the product can withstand in its longest version (uncutted) without damaging the connection holes or buckling the rail.

Product Number	Total Width x Total Height x Total Length	Fixing Hole	Fixing Slot	Angle
Reference letter	W x H x L	FH	FS	a
Unit description	(mm) x (mm) x (mm)	(mm)	(mm)	(DEG)
6621083	83 x 120 x 929.30	13	25x12.2	90