


Walraven Maxx HF Hammerfix

(H20526)

for fixing to Maxx Heavy Rail Profiles

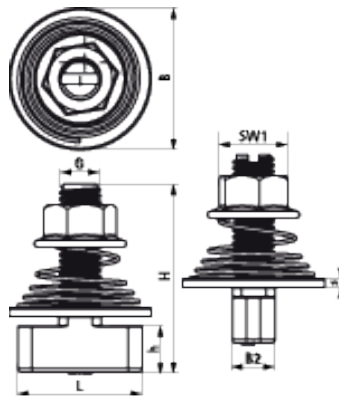

Features & benefits

- form-locking connector
- retains assembly in place before final tightening
- pre-assembled and ready to use for a quick fixing in profile perforation by a push and 90° turn
- with visible mark on top to see the position of hammer end
- with square shaft to block in the profile hole pattern when tightening
- material: steel, strength class 8.8; spring made of stainless steel (AISI 316)
- hot dip galvanized

Product Number	For Rail Type	Thread Size	Usable Length	Total Width x Total Height x Total Length	Connection Spanner Width (WAF)	Nut Torque Moment For Installation	Maximum Allowed Load
Reference letter		TS	LU	W x H x L	WAF _{cn}	T _{inst.}	F _{0,z}
Unit description			mm	mm x mm x mm	mm	Nm	N
65219214	80x80, 100x100, 100x120, 100x150	M12	35	40 x 55 x 40	19	75	14,500