


Walraven Maxx Cross Connector CC82

(H20553)

prefabbed Cross Connector

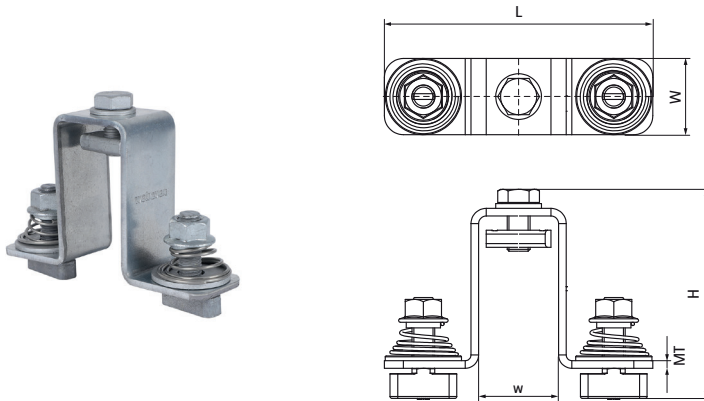

Features & benefits

- to connect Walraven RapidStrut® 82|H profiles to Walraven Maxx Profiles
- user friendly by rounded edges
- ready to use including pre-assembled fasteners to save installation time
- all pre-assembled fasteners in M12 for stable connections
- material: T-Bolt connectors M12 made from steel class 8.8, to be tightened with 75Nm
- material: Cross Connector: steel 1.0242 (S250GD) + ZM310 MAC
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- surface treatment: T-Bolt Connectors: hot dip galvanized

Product Number	Total Width x Total Height x Total Length	Material Thickness	Width	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference letter	W x H x L	MT	w	T inst.	Fa,z	Fa,x
Unit description	(mm) x (mm) x (mm)	(mm)	(mm)	(Nm)	(N)	(N)
6589117	40 x 109.80 x 141	4	42	75	3600	2400