


Walraven Maxx Cross Connector CC82

(H20553)

prefabbed Cross Connector

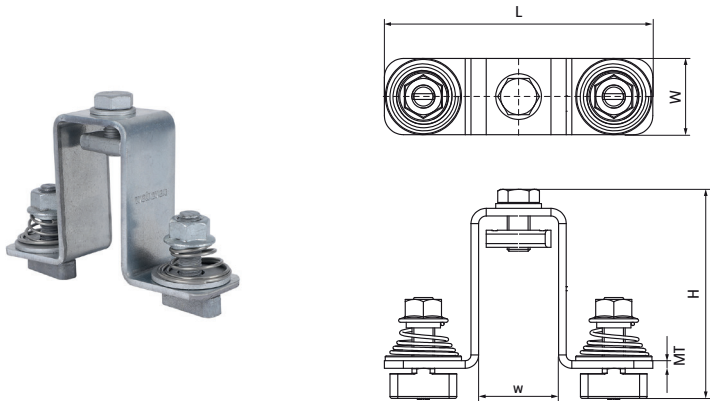

Features & benefits

- to connect Walraven RapidStrut® 82|H profiles to Walraven Maxx Profiles
- user friendly by rounded edges
- ready to use including pre-assembled fasteners to save installation time
- all pre-assembled fasteners in M12 for stable connections
- material: T-Bolt connectors M12 made from steel class 8.8, to be tightened with 75Nm
- material: Cross Connector: steel 1.0242 (S250GD) + ZM310 MAC
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- surface treatment: T-Bolt Connectors: hot dip galvanized

Product Number	For Rail Type	Total Width x Total Height x Total Length	Material Thickness	Width	Torque Moment For Installation	Maximum Al- lowed Load Faz	Maximum Al- lowed Load Fax
Reference letter		W x H x L	MT	w	T inst.	Fa,z	Fa,x
Unit description		mm x mm x mm	mm	mm	Nm	N	N
6589117	80x80, 100x100, 100x120, 100x150	40 x 109.8 x 141	4	42	75	3,600	2,400