


## Walraven RapidStrut® Hammerfix 'U' G2 (BUP1000)

(H2459)

for quick connection of clamps to the rail

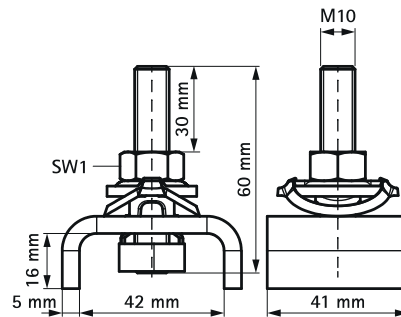

### Features & benefits

- slide nut with stud bolt, U-shaped washer and Walraven RapidStrut® spring
- U-shaped for extra stability
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- visual guide to check the position of the slide nut
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number   | For Rail Type                     | Thread Size | Thread Length | Usable Length | Material Thickness | Torque Moment For Installation | Maximum Allowed Load Fax | Maximum Allowed Load Faz | Total Width x Total Height x Total Depth |
|------------------|-----------------------------------|-------------|---------------|---------------|--------------------|--------------------------------|--------------------------|--------------------------|--|
| Reference letter |                                   | TS          | TL            | LU            | MT                 | T <sub>inst.</sub>             | Fa,x                     | Fa,z                     | W x H x DtT                              |
| Unit description |                                   |             | mm            | mm            | mm                 | Nm                             | N                        | N                        | mm x mm x mm                             |
| 665285006        | 41x21, 41x41, 41x51, 41x62, 41x82 | M10         | 60            | 30            | 5                  | 15                             | 1,250                    | 10,000                   | 52 x 65 x 41                             |