


Walraven Strut Bolt Set Socked Head

(H2472)

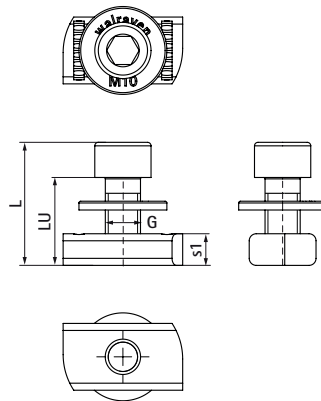

Features & benefits

- channel slide nut with bolt DIN933 and washer
- ready to use set for connecting brackets and other accessories to RapidStrut channels
- pre-assembled to save time at installation, no need to organize single fastener parts
- material: steel
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- tested load values in combination with Walraven RapidStrut® Rail 41x41x2.5mm.

Product Number	Thread Size	Thread Length	Usable Length	Material Thickness	Torque Moment For Installation	Maximum Allowed Load Fax	Maximum Allowed Load Faz	Total Width x Total Height x Total Depth
<i>Reference letter</i>	<i>TS</i>	<i>TL</i>	<i>LU</i>	<i>MT</i>	<i>T inst.</i>	<i>Fa,x</i>	<i>Fa,z</i>	<i>W x H x DtT</i>
<i>Unit description</i>		<i>(mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(Nm)</i>	<i>(N)</i>	<i>(N)</i>	<i>(mm) x (mm) x (mm)</i>
613581002	M10	25	25	9	40	2550	5000	25 x 35 x 34