


Walraven Strut Bolt Set Socked Head

(H2472)

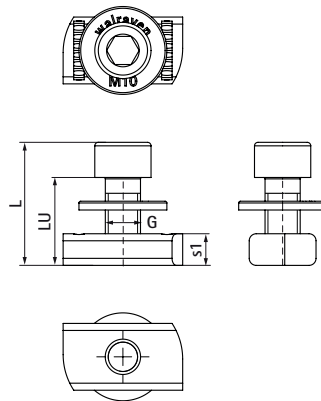

Features & benefits

- channel slide nut with bolt DIN933 and washer
- ready to use set for connecting brackets and other accessories to RapidStrut channels
- pre-assembled to save time at installation, no need to organize single fastener parts
- material: steel
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- tested load values in combination with Walraven RapidStrut® Rail 41x41x2.5mm.

Product Number	For Rail Type	Thread Size	Thread Length	Usable Length	Material Thickness	Torque Moment For Installation	Maximum Allowed Load Fax	Maximum Allowed Load Faz	Total Width x Total Height x Total Depth
Reference letter		TS	TL	LU	MT	T _{inst.}	F _{a,x}	F _{a,z}	W x H x DtT
Unit description			mm	mm	mm	Nm	N	N	mm x mm x mm
613581002	41x21, 41x41, 41x51, 41x62, 41x82	M10	25	25	9	40	2,550	5,000	25 x 35 x 34