


Walraven RapidStrut® Ball Swivel Hanger

(H2475)

for flexible connections and pipe movement

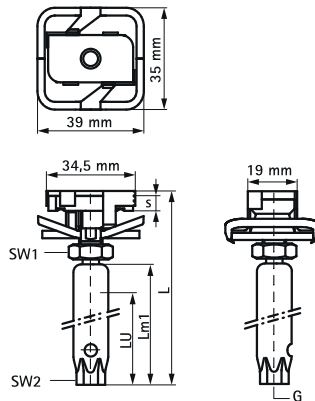

Features & benefits

- slide nut with ball swivel hanger, washer and Walraven RapidStrut® spring
- recommended for metal pipes up to DN 50, plastic pipes up to DN 100
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- with inspection hole to check screw-in depth (attention: when the threaded rod is screwed-in too deep, the ball swivel is blocked)
- screw-in depth is continuously variable (see LU)
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated
- tested for fire safety according to EN 1363-1
- The maximum length change that can be dealt with, depends on the fixing distance (ceiling - pipe). The height difference that occurs as a result, needs to be taken into consideration.
- To be used in combination with Walraven Ball Swivel Hangers.



Product Number	Thread Size	Thread Length	Usable Length	Maximum Allowed Load Faz	Total Width x Total Height x Total Depth Faz
Reference letter	TS	TL	LU	Fa,z	W x H x Dt
Unit description		(mm)	(mm)	(N)	(mm) x (mm) x (mm)
66530805	M8	50	37.50	3100	43.20 x 80 x 40.80
66530005	M10	50	43	3100	43.20 x 80 x 40.80