


Walraven RapidStrut® Connector 90° Rigid (BUP1000)

(H2825)

for rigid angle connections

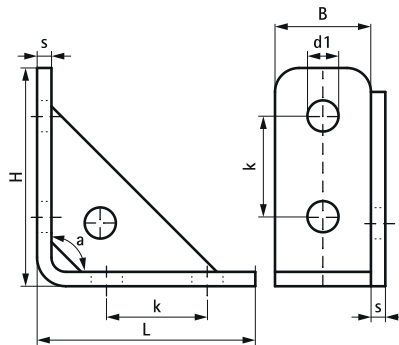

Features & benefits

- reinforced connector to make rigid fabrications with Walraven RapidStrut® rails
- easy fitting due to rounded edges
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- Faz: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5 and bolted 2 x M12 - 30Nm).
- Fax2: max. allowed load (with channel 41x41x2.5 and bolted 2 x M12 - 60Nm).



Product Number	Angle	Total Width x Total Height x Total Length	Material Thickness	Width	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference letter	a	W x H x L	MT	w	T inst.	Fa,z	Fa,x
Unit description	(DEG)	(mm) x (mm) x (mm)	(mm)	(mm)	(Nm)	(N)	(N)
66588291	90	46 x 91 x 91	6	40	30	4000	3000