


## Walraven RapidStrut® Connector, Hinged (BUP1000)

(H2840)

for flexible angle connections

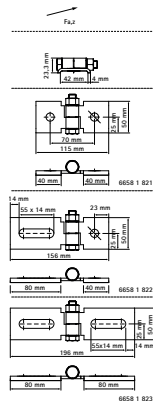

### Features & benefits

- to make fabrication with Walraven RapidStrut® Rail
- fully adjustable
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number   | Total Width x Total Height x Total Length | Material Thickness | Width | Maximum Allowed Load $F_{a,z}$ |
|------------------|-------------------------------------------|--------------------|-------|--------------------------------|
| Reference letter | $W \times H \times L$                     | MT                 | w     | $F_{a,z}$                      |
| Unit description | (mm) x (mm) x (mm)                        | (mm)               | (mm)  | (N)                            |
| 66581821         | 62.50 x 24.10 x 115.40                    | 4                  | 42    | 1000                           |
| 66581822         | 62.50 x 24.10 x 155.90                    | 4                  | 42    | 1000                           |
| 66581823         | 62.50 x 24.10 x 196.40                    | 4                  | 42    | 1000                           |