


Walraven RapidStrut® Rail Connector 135° G2 (BUP1000)

(H2854)

to make Strut rail fabrications

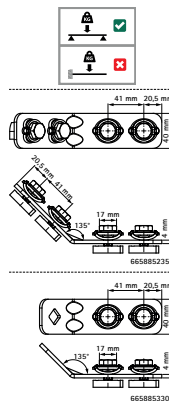

Features & benefits

- connector with pre-assembled Walraven RapidStrut® Slide nut(s)
- to make fabrication with Walraven RapidStrut® Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- 'Direct Twist' technology for easy and secure installation
- visual guide to check the position of the slide nut
- optimized for easy installation with electrical tools
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	Angle	Total Width x Total Height x Total Length	Material Thickness	Width
Reference letter	a	W x H x L	MT	w
Unit description	(DEG)	(mm) x (mm) x (mm)	(mm)	(mm)
665885235	135	40 x 83.40 x 173.60	4	40
665885330	135	40 x 50.30 x 139.80	4	40