


# Walraven RapidStrut® Rail Connector - U-shaped G2 (BUP1000)

(H2889)

to make Strut rail fabrications

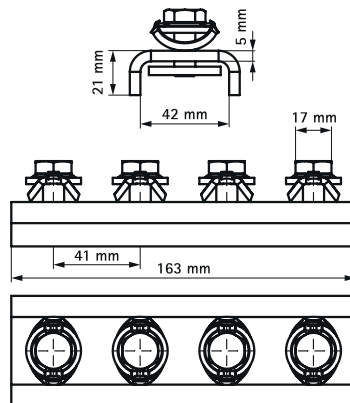

## Features & benefits

- connector with pre-assembled Walraven RapidStrut® Slide nut(s)
- to make fabrication with Walraven RapidStrut® Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	Total Width x Total Height x Total Length	Material Thickness	Width	Torque Moment For Installation	Maximum Allowed Load Fax
Reference letter	W x H x L	MT	w	T inst.	Fa,x
Unit description	(mm) x (mm) x (mm)	(mm)	(mm)	(Nm)	(N)
665885421	52 x 39.90 x 163	5	42	30	690