


Walraven RapidStrut® Inter Flange Clamp

(H3650)

to connect Strut rails inside of steel beam flanges

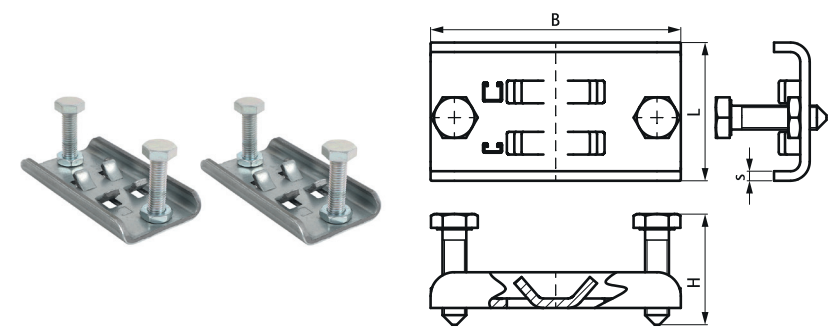

Features & benefits

- set of two clamping plates, to be installed in combination with Walraven RapidStrut® Rail
- for connecting installation between the flanges of I- or U-profile steelwork without drilling or welding
- material: clamp made of steel 1.0242 (S250GD); hexagon head bolts M10x40 with tip: steel class 8.8 (EN-ISO 898-1); hexagon thin nuts M10 DIN 439-B: steel class 04 (EM-ISO 898-2)
- clamp: ZM310-MAC (pre-galvanized); fasteners: zinc plated ISO 2081-Fe/Zn5/A (EN ISO 2081:2008)

Product Number	For Rail Type	Thread Size	Total Width x Total Height x Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter		TS	W x H x L	MT	Fa,z
Unit description			(mm) x (mm) x (mm)	(mm)	(N)
6078031	41x21, 41x41	M10	105 x 40 x 58	4	2100