


Walraven Yeti® 480 Support System

(10405)

for Rooftop Installations

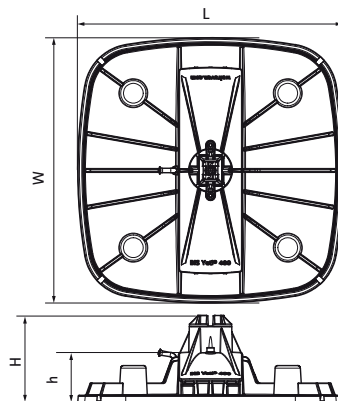

Features & benefits

- modular supporting system for HVAC equipment, solar panels, walkways, pipe work, cable runs, etc.
- for flat and low pitched roofs
- adjustable up to 7° to compensate roof pitch
- 360° rotatable insert for Walraven RapidStrut® 41x41 or Walraven RapidStrut® DS 5 (41x52 mm)
- with non-slip anti-vibration mat (at PVC roofs a separating layer must be installed to protect against plasticizer migration - see Walraven Walraven Yeti® Triplex Separation Layer)
- with optional stackable ballast block for increased weight / stability
- mouldings made of WPC, a composite of recycled plastic and wood fibre
- resistant to UV and chemical influences
- UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB
- For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.
- In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.
- Max. allowed load without taking influence of insulation into account, using RapidStrut® channel type 41|H



Product Number	Model	Total Width	Total Length	Total Height	Height	Maximum Load
Reference letter		W	L	H	h	
Unit description		(mm)	(mm)	(mm)	(mm)	(N)
67685001	Vertical	480	480	160	80	20000
67685101	Horizontal	480	480	160	70.50	20000
67685301	H-Set without rail	486	486	91	80	20000