


## Walraven Yeti® 335 Support System

(I0410)

for Rooftop Installations

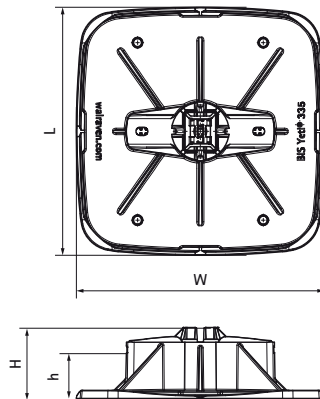

### Features & benefits

- modular supporting system for HVAC equipment, solar panels, walkways, pipe work, cable runs, etc.
- for flat roofs
- for horizontal and vertical applications
- 360° rotatable insert for Walraven RapidStrut® 41x41 or Walraven RapidStrut® DS 5 (41x52 mm)
- with non-slip anti-vibration mat
- mouldings made of WPC, a composite of recycled plastic and wood fibre
- resistant to UV and chemical influences
- noise reduction according to DIN EN ISO 10140-1 and DIN EN ISO 10140-3 up to 31 dB(A)
- For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.
- In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.
- Max. allowed load without taking influence of insulation into account, using RapidStrut® channel type 41|H

Product Number	Model	Total Width	Total Length	Total Height	Height	Maximum Load
Reference letter		W	L	H	h	
Unit description		(mm)	(mm)	(mm)	(mm)	(N)
67685201	Vertical	335	335	85	100	20000
67685302	H-Set without rail	335	335	100	100	20000