


Walraven Beam Clamp Model C

(K2005)

for clamping on beam flange

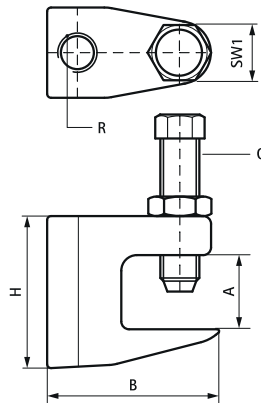

Features & benefits

- for a solid fixing to steel construction without the need for welding or drilling
- according to VdS-regulations an additional safety strap should be used when supporting pipes above DN65
- bolt with hexagon head according to DIN 933 strength class 8.8, screw point with cup ring according to EN ISO 4753 and lock nut
- material: beam clamp made of cast iron; bolt of hardened steel, nut of steel, zinc plated
- FM approval and UL listed for hanger rod sizes M10, M12 and M16
- see also: Walraven Safety Strap (page K 20 06)



Product Number	Maximum Clamping Thickness	Maximum Clamping Depth	Total Width x Total Height x Total Depth	Connection Hole	Thread Size	Width Across Flats	Maximum Allowed Load Faz
Reference letter			W x H x DtT	CH	TS	WAF	Fa,z
Unit description	(mm)	(mm)	(mm) x (mm) x (mm)	(mm)		(mm)	(N)
6003006	23	20	50 x 45 x 21		M6	17	2500
6003008	23	20	50 x 65 x 21		M8	17	2500
6003010	20	20	44 x 62 x 21		M10	17	2500
6003012	26	22	58 x 74 x 24		M12	17	3500
6003016	28	23	58 x 78 x 30		M16	19	5500
6003206	18	18	38 x 35 x 21		M6	13	1200
6003208	18	18	38 x 55 x 19		M8	13	1200
6003310	28	23	58 x 58 x 30		M10	19	2500
6003905	18	18	35 x 57 x 19	9		13	1200
6003906	18	18	38 x 57 x 19	7		13	1200
6003908	23	20	50 x 45 x 21	9		17	2500
6003910	20	20	44 x 42 x 21	11		17	2500
6003912	26	22	58 x 54 x 24	13		17	3500