


Walraven WDI1R Drop-in Anchor Short

(L0320)

reduced length drop-in anchor with a lip collar

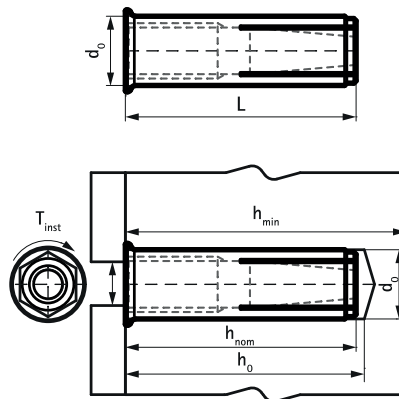

Features & benefits

- simple and quick installation procedure
- collar with a lip for flush anchor setting at any hole depth
- medium load capacity
- ETA ETAG001 Part 6 approval for multiple use for non-structural applications
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- complies with VdS CEA 4001.2024-01 (08) for applications with sprinkler systems in concrete (M8-M12)
- substrate type: cracked concrete, non-cracked concrete
- reduced 25 mm anchor length allows approved applications in precast prestressed hollow core slabs
- material: steel
- zinc plated

Product Number	Thread Size	Thread Type	Total Width x Total Height x Total Length	Drill Hole Diameter	Min. Drill Hole Depth	Standard Embedment Depth	Minimum Substrate Thickness
Reference letter	TS	TT	W x H x L	d0	h0 min	hnom	hmin
Unit description			mm x mm x mm	mm	mm	mm	mm
6103206	M6	Metric	8 x 8 x 25	8	25	≥ 25	80
6103208	M8	Metric	10 x 10 x 25	10	25	≥ 25	80
6103210	M10	Metric	12 x 12 x 25	12	25	≥ 25	80
6103212	M12	Metric	14 x 14 x 25	8	25	≥ 25	80