


Walraven WDI2R Drop-in Anchor

(L0321)

reduced length drop-in anchor with a lip collar

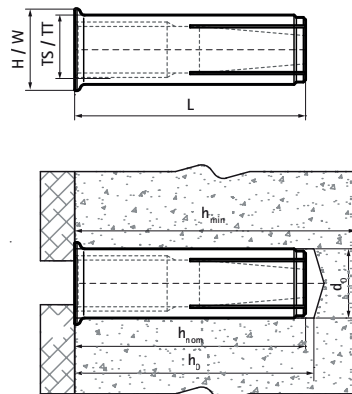

Features & benefits

- European Technical Assessment according to EAD 330747-00-0601 (May 2018) for fasteners for use in concrete for redundant non-structural systems.
- increased productivity – the reduced 25mm anchor length minimizes drilling depth and speeds up installation
- approved applications in precast prestressed hollow core slabs
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- complies with VdS CEA 4001: 2024-01 (08) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete
- for loads and more information, refer to the product data sheet and/or the ETA report
- material: steel

Product Number	Thread Size	Thread Type	Total Width x Total Height x Total Length	Drill Hole Diameter	Min. Drill Hole Depth	Standard Embedment Depth	Minimum Substrate Thickness
Reference letter	TS	TT	W x H x L	d0	h0 min	hnom	hmin
Unit description			mm x mm x mm	mm	mm	mm	mm
6103310825	M8	Metric	11 x 11 x 25	10	28	≥ 25	80
6103311025	M10	Metric	13 x 13 x 25	12	28	≥ 25	80
6103311225	M12	Metric	16 x 16 x 25	15	29	≥ 25	80