


Walraven CP

(L1024)

fixing to aerated concrete, plaster block

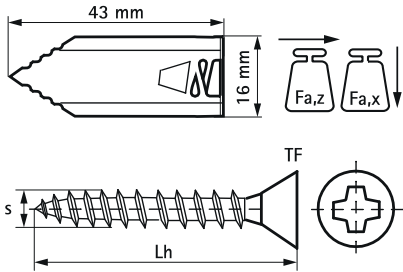

Features & benefits

- hammer-in plug
- plug anchors itself when tightening the screw
- does not rotate on screwing
- for medium applications into plaster block or aerated concrete block
- for chipboard screw (Ø 4.0 - 5.0 mm, min. length 45 mm)
- easy and quick to use
- pre-drill hole Ø 8 mm to avoid breaking of material during screwing
- material: steel
- surface treatment: zinc plated, colored

| Product Number | Total Length | Minimum Screw Depth | Screw Size | Total Height | Total Width |
|------------------|--------------|---------------------|------------|--------------|-------------|
| Reference letter | L | 45 | ds | H | W |
| Unit description | (mm) | ls,min | | (mm) | (mm) |
| 6117063 | 43 | 45 | 4.0 - 5.0 | 7 | 17 |
| 6117153 | 50 | 50 | 4.0 | 8 | 17 |