


Walraven CP

(L1024)

fixing to aerated concrete, plaster block

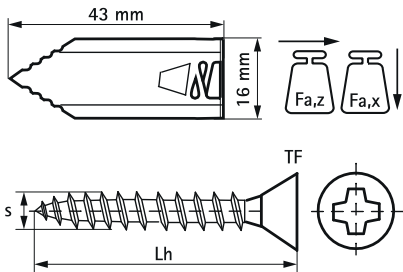

Features & benefits

- hammer-in plug
- plug anchors itself when tightening the screw
- does not rotate on screwing
- for medium applications into plaster block or aerated concrete block
- for chipboard screw (Ø 4.0 - 5.0 mm, min. length 45 mm)
- easy and quick to use
- pre-drill hole Ø 8 mm to avoid breaking of material during screwing
- material: steel
- surface treatment: zinc plated, colored

Product Number	Total Length	Minimum Screw Depth	Screw Size	Suitable For Screw Diameter	Total Height	Total Width
Reference letter	L	ls,min	ds		H	W
Unit description	mm	mm		mm	mm	mm
6117063	43	45	4.0 - 5.0	4 - 5	7	17
6117153	50	50	4	4 - 5	8	17