


Walraven Toggle Plug (Stud-end)

(L1025)

fixing to hollow walls & ceilings

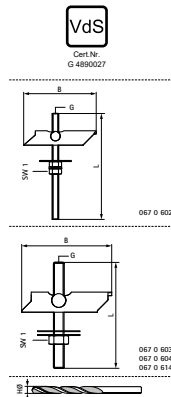

Features & benefits

- U-profile with rotating shaft with stud bolt
- for fixing in hollow walls and hollow ceilings or profiled roofing sheets
- with VdS-approval - certificate number G 4890027 (M10) max. DN 50 - 2"
- with FM-approval - certificate number 3047342 max. DN 40 - 1 1/2"
- load capacity of the plug is influenced by the surface
- material: metal parts made of steel; protective washer made of rubber (0670602 without rubber washer)
- zinc plated



Product Number	Total Width	Total Height	Total Length	Total Depth
Reference letter	W	H	L	DtT
Unit description	(mm)	(mm)	(mm)	(mm)
0670602	69	100	30	30
0670603	74	100	40	40
0670604	85	85	100	100
0670614	85	40	200	200