


Walraven VibraTek® MS-1 Spring Mount

(L20506)

high performance spring isolator for light equipment

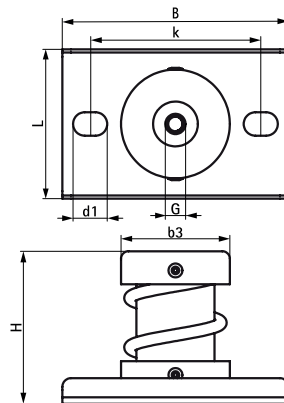

Features & benefits

- recommended for equipment with low working speeds, from 700 rpm and above
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- average ratio $K_x / K_z = K_y / K_z = 1.0$
- working temperature range -90 °C till 150 °C

Product Number	Thread Female	Thread Type	Total Width x Total Height x Total Depth	Fixing Slot	Heart To Heart Distance	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
<i>Reference letter</i>	<i>Tfem</i>	<i>TT</i>	<i>W x H x DtT</i>	<i>FS</i>	<i>k</i>			25
<i>Unit description</i>			<i>(mm) x (mm) x (mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(N)</i>	<i>(N)</i>	<i>(mm)</i>
2800300050	M8	Metric	70 x 74 x 106	16x11	80	10	45	25
2800300150	M8	Metric	70 x 74 x 106	16x11	80	30	140	25
2800300250	M8	Metric	70 x 74 x 106	16x11	80	50	230	25
2800300500	M8	Metric	70 x 74 x 106	16x11	80	100	460	25
2800300750	M8	Metric	70 x 74 x 106	16x11	80	150	690	25
2800301000	M8	Metric	70 x 74 x 106	16x11	80	200	920	25