


Walraven VibraTek® MS-1 Spring Mount

(L20506)

high performance spring isolator for light equipment

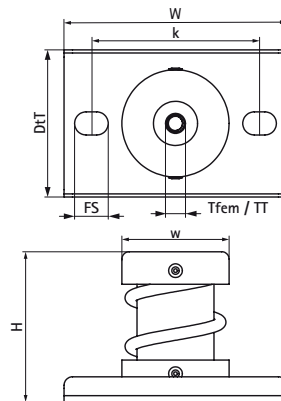

Features & benefits

- recommended for equipment with low working speeds, from 700 rpm and above
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- average ratio $K_x / K_z = K_y / K_z = 1.0$
- working temperature range $-90\text{ }^{\circ}\text{C}$ till $150\text{ }^{\circ}\text{C}$

Product Number	Thread Female	Thread Type	Total Width x Total Height x Total Depth	Width	Fixing Slot	Heart To Heart Distance	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	Tfem	TT	W x H x DtT	w	FS	k			25
Unit description			mm x mm x mm	mm	mm	mm	N	N	mm
2800300050	M8	Metric	106 x 74 x 70	51	16x11	80	10	45	25
2800300150	M8	Metric	106 x 74 x 70	51	16x11	80	30	140	25
2800300250	M8	Metric	106 x 74 x 70	51	16x11	80	50	230	25
2800300500	M8	Metric	106 x 74 x 70	51	16x11	80	100	460	25
2800300750	M8	Metric	106 x 74 x 70	51	16x11	80	150	690	25
2800301000	M8	Metric	106 x 74 x 70	51	16x11	80	200	920	25