


Walraven VibraTek® MS-2X Spring Mount

(L20512)

high performance spring isolator for heavy equipment

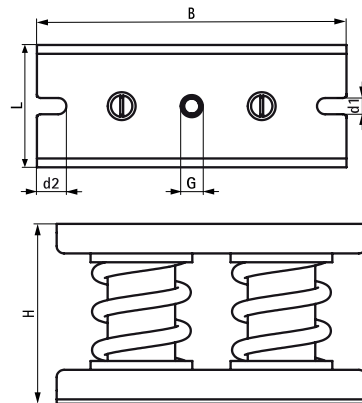

Features & benefits

- recommended for machinery with low working speeds above 600 rpm
- flexible internal filler prevents debris and solid elements entering and damaging the spring under load
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- ratio $K_x / K_z = 0.98$; ratio $K_y / K_z = 1.4$
- working temperature range -90°C till 150°C

Product Number	Thread Female	Thread Type	Total Width x Total Height x Total Depth	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
<i>Reference letter</i>	<i>Tfem</i>	<i>TT</i>	<i>W x H x DtT</i>			25
<i>Unit description</i>			<i>(mm) x (mm) x (mm)</i>	<i>(N)</i>	<i>(N)</i>	<i>(mm)</i>
2802003000	M12	Metric	83 x 121 x 210	600	2760	25
2802004000	M12	Metric	83 x 121 x 210	800	3680	25
2802006000	M12	Metric	83 x 121 x 210	1200	5520	25
2802008000	M12	Metric	83 x 121 x 210	1600	7360	25
2802010000	M12	Metric	83 x 121 x 210	2000	9200	25
2802012000	M12	Metric	83 x 121 x 210	2400	11040	25