


Walraven VibraTek® MS-2X Spring Mount

(L20512)

high performance spring isolator for heavy equipment

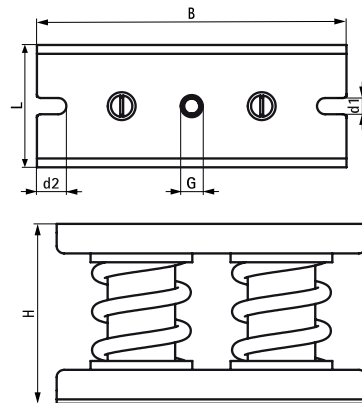

Features & benefits

- recommended for machinery with low working speeds above 600 rpm
- flexible internal filler prevents debris and solid elements entering and damaging the spring under load
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- ratio $K_x / K_z = 0.98$; ratio $K_y / K_z = 1.4$
- working temperature range -90°C till 150°C

Product Number	Thread Female	Thread Type	Total Width x Total Height x Total Depth	Fixing Slot	Heart To Heart Distance	Fixing Hole	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	Tfem	TT	W x H x DtT	FS	k	FH			25
Unit description			mm x mm x mm	mm	mm	mm	N	N	mm
2802003000	M12	Metric	83 x 121 x 210	20x11	181	14.5	600	2,760	25
2802004000	M12	Metric	83 x 121 x 210	20x11	181	14.5	800	3,680	25
2802006000	M12	Metric	83 x 121 x 210	20x11	181	14.5	1,200	5,520	25
2802008000	M12	Metric	83 x 121 x 210	20x11	181	14.5	1,600	7,360	25
2802010000	M12	Metric	83 x 121 x 210	20x11	181	14.5	2,000	9,200	25
2802012000	M12	Metric	83 x 121 x 210	20x11	181	14.5	2,400	11,040	25