


Walraven VibraTek® MR-L 5000/M12 Rubber Levelling Mount

(L20524)

rubber mount with M12 connection for equipment isolation and levelling

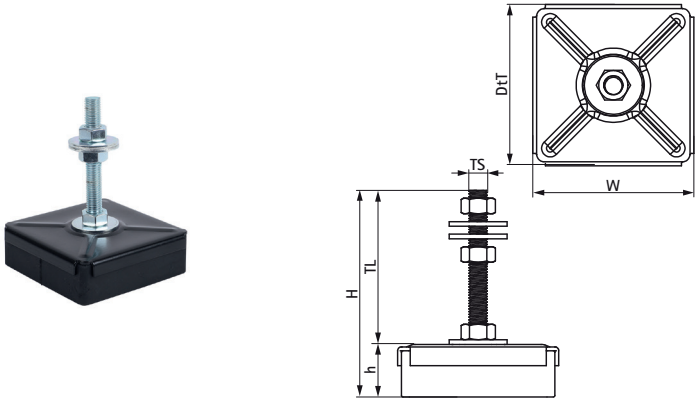

Features & benefits

- recommended for machinery with working speeds above 2500 rpm, providing a degree of vibration insulation from 75% to 80%
- simple to install and does not need to be fixed to the supporting structure
- rubber isolator with DIN 934 nuts and DIN 9012 washers included in delivery for mounting and levelling equipment
- metal and rubber parts can be separated for recycling
- hardness 45 Shore A
- working temperature range -20 °C till 90 °C

Product Number	Thread Size	Total Width x Total Height x Total Depth	Height	Thread Length	Recommended Mini- mum Load Faz	Recommended Maxi- mum Load Faz	Maximum Static Deflection
Reference letter	TS	W x H x DtT	h	TL			4.5
Unit description		mm x mm x mm	mm	mm	N	N	mm
2800105000	M12	103 x 132 x 103	32	100	700	4,500	4.5