


Walraven VibraTek® MR-L 8000/M16 Rubber Levelling Mount

(L20527)

rubber mount with M16 connection for equipment isolation and levelling

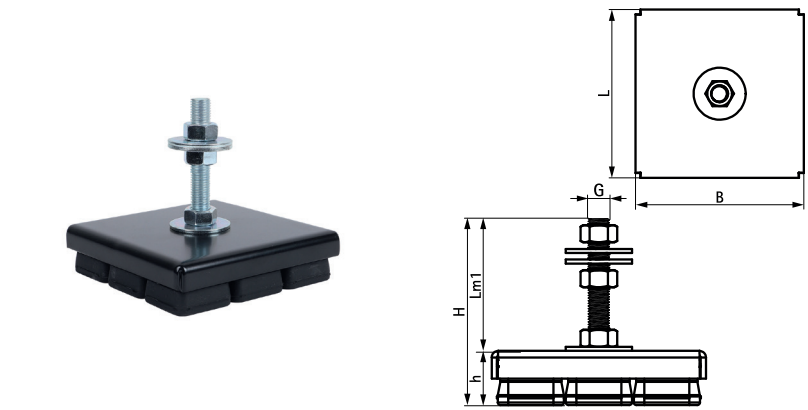

- Features & benefits**
- recommended for machinery with working speeds above 2500 rpm, providing a degree of vibration insulation from 75% to 80%
  - simple to install and does not need to be fixed to the supporting structure
  - rubber isolator with DIN 934 nuts and DIN 9012 washers included in delivery for mounting and levelling equipment
  - metal and rubber parts can be separated for recycling
  - hardness 45 Shore A
  - working temperature range -20 °C till 90 °C

Product Number	Thread Size	Total Width x Total Height x Total Depth	Thread Length	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	TS	W x H x DtT	TL			7.50
Unit description		(mm) x (mm) x (mm)	(mm)	(N)	(N)	(mm)
2800108000	M16	155 x 70 x 155	100	1000	7500	7.50