


Walraven VibraTek® MR-L 8000/M16 Rubber Levelling Mount

(L20527)

rubber mount with M16 connection for equipment isolation and levelling

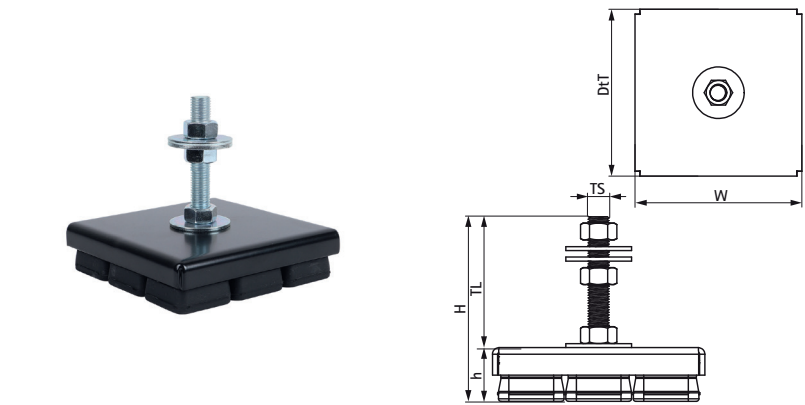

- Features & benefits**
- recommended for machinery with working speeds above 2500 rpm, providing a degree of vibration insulation from 75% to 80%
 - simple to install and does not need to be fixed to the supporting structure
 - rubber isolator with DIN 934 nuts and DIN 9012 washers included in delivery for mounting and levelling equipment
 - metal and rubber parts can be separated for recycling
 - hardness 45 Shore A
 - working temperature range -20 °C till 90 °C

Product Number	Thread Size	Total Width x Total Height x Total Depth	Height	Thread Length	Recommended Mini- mum Load Faz	Recommended Maxi- mum Load Faz	Maximum Static Deflection
Reference letter	TS	W x H x DtT	h	TL			7.5
Unit description		mm x mm x mm	mm	mm	N	N	mm
2800108000	M16	162 x 141 x 162	41	100	1,000	7,500	7.5