


Walraven VibraTek® MR-B Rubber Mount

(L20530)

bell-shaped elastomer isolator for isolation of equipment and machinery

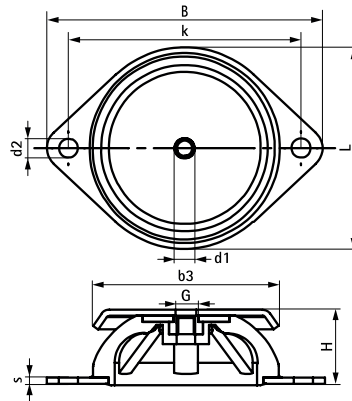

Features & benefits

- recommended for machinery with working speeds above 2500 rpm, providing a degree of vibration insulation from 75% to 80%
- ideally suited for machinery with radial vibration (as opposed to axial) and prone to sudden or pronounced starts and stops
- metal and rubber parts can be separated for recycling
- working temperature range -30 °C till 80 °C

Product Number	Thread Female	Thread Type	Total Width x Total Diameter		Fixing Hole	Heart To Heart Distance	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
			Height x Total Depth						
Reference letter	Tfem	TT	W x H x DtT	d	FH	k			3.50
Unit description			(mm) x (mm) x (mm)	(mm)	(mm)	(mm)	(N)	(N)	(mm)
2801800240	M6	Metric	60 x 24 x 90	6.70 - 60	6.70	76	50	225	3.50
2801800750	M8	Metric	80 x 27 x 120	8.20 - 80	8.20	100	130	700	4
2801801500	M10	Metric	100 x 28 x 148	11 - 100	11	124	150	1400	5.50