


Walraven VibraTek® MS-1X-CBL Spring Mount

(L20533)

high performance spring isolator for use with A-L1 welding bracket and concrete inertia base frames

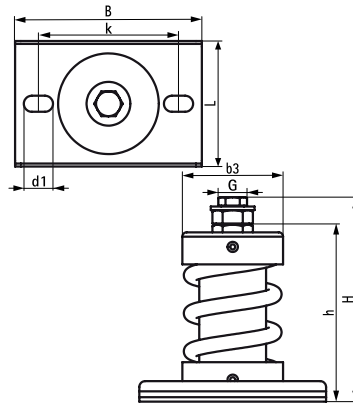

Features & benefits

- recommended for machinery with low working speeds above 600 rpm
- flexible internal filler prevents debris and solid elements entering and damaging the spring under load
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- average ratio $K_x / K_z = K_y / K_z = 0.7$
- working temperature range -90 °C till 150 °C

Product Number	Thread Female	Thread Type	Total Width x Total Height x Total Depth	Fixing Slot	Heart To Heart Distance	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
<i>Reference letter</i>	<i>Tfem</i>	<i>TT</i>	<i>W x H x DtT</i>	<i>FS</i>	<i>k</i>			25
<i>Unit description</i>			<i>(mm) x (mm) x (mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(N)</i>	<i>(N)</i>	<i>(mm)</i>
2801901000	M10	Metric	86 x 141 x 128	20x11	96	200	920	25
2801901250	M10	Metric	86 x 141 x 128	20x11	96	250	1150	25
2801901500	M10	Metric	86 x 141 x 128	20x11	96	300	1380	25
2801902000	M10	Metric	86 x 141 x 128	20x11	96	400	1840	25
2801903000	M10	Metric	86 x 141 x 128	20x11	96	600	2760	25
2801904000	M10	Metric	86 x 141 x 128	20x11	96	800	3680	25
2801905000	M10	Metric	86 x 141 x 128	20x11	96	1000	4600	25
2801906000	M10	Metric	86 x 141 x 128	20x11	96	1200	5520	25