


Walraven VibraTek® HS-1 Spring Hanger

(L20539)

high performance spring isolator for light suspended loads

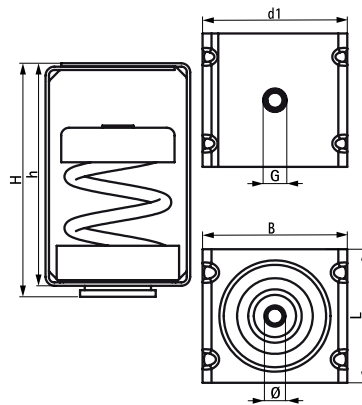

Features & benefits

- simple to install and does not need to be fixed to the base material
- recommended for machinery with low working speeds above 700 rpm
- epoxy powder-coated housing, cap and spring provide increased resistance to corrosion
- rubber spring base cup prevents contact between housing and the spring
- working temperature range -90 °C till 150 °C

Product Number	Connection Thread	Total Width x Total Height x Total Depth	Fixing Hole	Connection Hole	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	G	W x H x DtT	FH	CH			23
Unit description		(mm) x (mm) x (mm)	(mm)	(mm)	(N)	(N)	(mm)
2800600050	M8	65 x 100 x 60	10.50	24	5	45	23
2800600150	M8	65 x 100 x 60	10.50	24	20	140	23
2800600250	M8	65 x 100 x 60	10.50	24	30	230	23
2800600500	M8	65 x 100 x 60	10.50	24	50	450	23
2800600750	M8	65 x 100 x 60	10.50	24	80	690	23
2800601000	M8	65 x 100 x 100	10.50	24	100	920	23