


Walraven VibraTek® HR-1 Rubber Hanger

(L20545)

rubber hanger for isolation of suspended ventilation and AC systems

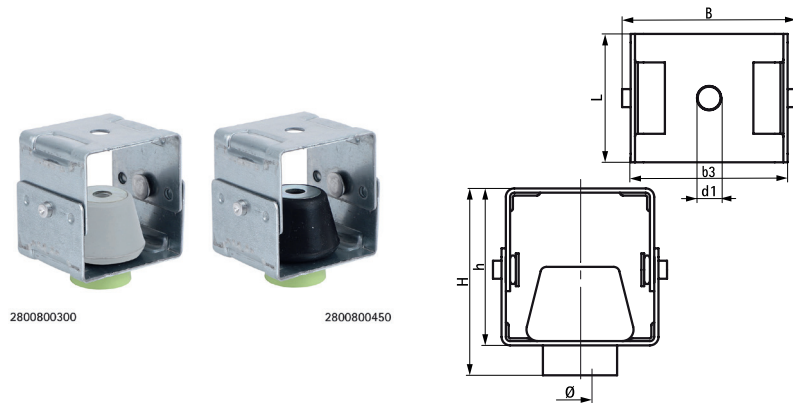

Features & benefits

- small footprint allows placement in compact spaces
- simple to install and adaptable to a sloping roof or ceiling, part of the metal housing swivels
- hardness 45 / 50 Shore A
- material: metal parts made of steel, rubber parts made of EPDM
- zinc plated
- working temperature range -20 °C till 90 °C

Product Number	Total Width x Total Height x Total Depth	Fixing Hole	Connection Hole	Colour	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	W x H x DtT	FH	CH				3
Unit description	(mm) x (mm) x (mm)	(mm)	(mm)		(N)	(N)	(mm)
2800800300	55 x 55 x 45	8.50	8	Zinc	5	250	3
2800800450	55 x 55 x 45	8.50	8	Zinc	10	400	3