


Walraven VibraTek® HR-1 Rubber Hanger

(L20545)

rubber hanger for isolation of suspended ventilation and AC systems

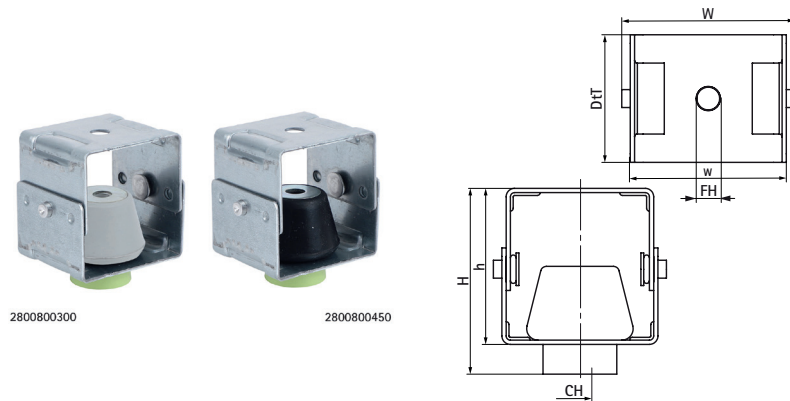

Features & benefits

- small footprint allows placement in compact spaces
- simple to install and adaptable to a sloping roof or ceiling, part of the metal housing swivels
- hardness 45 / 50 Shore A
- material: metal parts made of steel, rubber parts made of EPDM
- zinc plated
- working temperature range -20 °C till 90 °C

Product Number	Total Width x Total Height x Total Depth	Height	Width	Fixing Hole	Connection Hole	Colour	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	W x H x DtT	h	w	FH	CH				3
Unit description	mm x mm x mm	mm	mm	mm	mm		N	N	mm
2800800300	61 x 66 x 45	55	55	8.5	8	Zinc	5	250	3
2800800450	61 x 66 x 45	55	55	8.5	8	Zinc	10	400	3