


Walraven VibraTek® SB-MM Silentblock

(L20560)

a rubber silentblock with two external threads

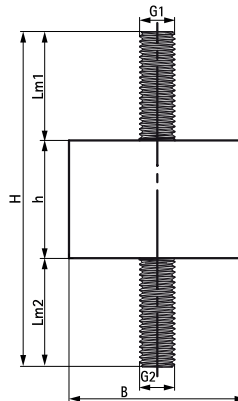

Features & benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- with two male threads
- for use in compression only
- working temperature range -30 °C till 80 °C

Product Number	Thread Size A	Thread Size B	Thread Length A	Thread Length B	Total Depth	Maximum Allowed Load Faz
<i>Reference letter</i>	<i>TSA</i>	<i>TSB</i>	<i>TLA</i>	<i>TLB</i>	<i>DtT</i>	<i>Fa,z</i>
<i>Unit description</i>			<i>(mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(N)</i>
2801400181	M8	M8	23	23	56	180
2801400291	M8	M8	23	23	56	290
2801400420	M8	M8	23	23	71	420
2801400750	M8	M8	23	23	86	750
2801401170	M10	M10	28	28	96	1170
2801401690	M12	M12	37	37	114	1690