


Walraven VibraTek® SB-MF Silentblock

(L20563)

a rubber silentblock with an external and internal thread

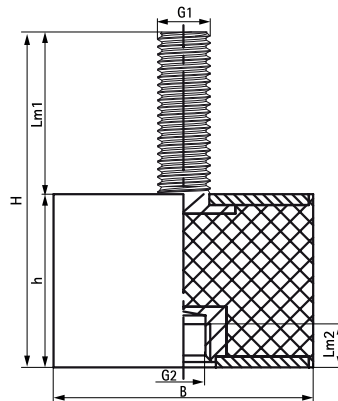

Features & benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- with a male and female thread
- for use in compression only
- working temperature range -30 °C till 80 °C

Product Number	Thread Size A	Thread Size B	Thread Length A	Thread Length B	Total Depth	Maximum Allowed Load Faz
Reference letter	TSA	TSB	TLA	TLB	DtT	Fa,z
Unit description			(mm)	(mm)	(mm)	(N)
2801500181	M8	M8	23	8	38	180
2801500291	M8	M8	23	8	38	290
2801500420	M8	M8	23	8	48	420
2801500750	M8	M8	23	8	63	750
2801501170	M10	M10	28	8	68	1170
2801501690	M12	M12	37	10	77	1690