


Walraven VibraTek® SB-M Silentblock

(L20569)

a rubber silentblock with one external thread

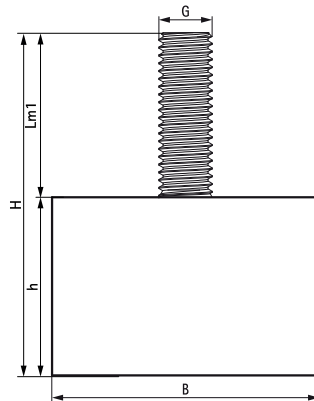

Features & benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- for use in compression only
- with an external thread and a rubber base
- working temperature range -30 °C till 80 °C

Product Number	Thread Size A	Thread Length A	Total Depth	Maximum Allowed Load Faz
Reference letter	TSA	TLA	DtT	Fa,z
Unit description		(mm)	(mm)	(N)
2801700181	M8	23	38	180
2801700291	M8	23	38	290
2801700420	M8	23	48	420
2801700750	M8	23	63	750
2801701170	M10	28	68	1170
2801701690	M12	37	77	1690