


Walraven RapidStrut® Stainless Steel channel


(M4505)

suspension and support

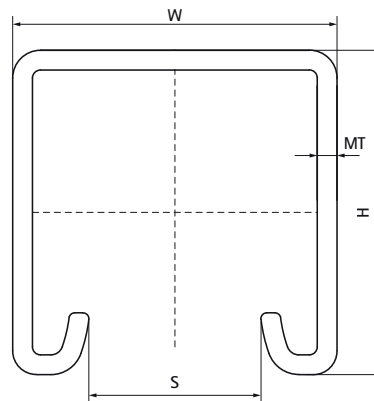

Features & benefits

- universal rail system
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- type 41x41x2,5 tested for fire safety according EN1363-1
- material: stainless steel 1.4404 (AISI 316L)
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



EPD



Product Number	Type	Total Width x Total Height x Total Length	Material Thickness	Profile Opening
Reference letter		W x H x L	MT	S
Unit description		(mm) x (mm) x (mm)	(mm)	(mm)
6507327	41x21x2,5	41 x 21 x 3000	2.50	22
6507627	41x21x2,5	41 x 21 x 6000	2.50	22
6507347	41x41x2,5	41 x 41 x 3000	2.50	22
6507647	41x41x2,5	41 x 41 x 6000	2.50	22